


PLXDIGI/PLXTRACKER SIDE

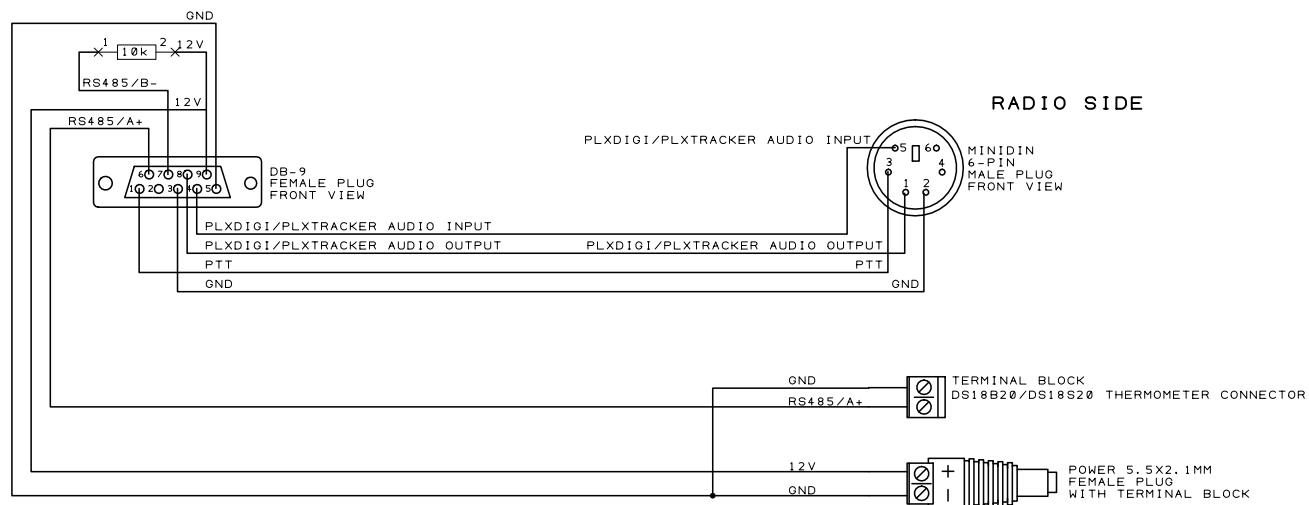

Note: Thermometer works in "parasite power" mode, power is taken from RS485/A+ data line. Therefore both DS18B20/DS18S20 VDD and GND pins should be connected to GND. DQ should be connected to RS485/A+.

CAB18/THERMO - PLXDigi/PLXTracker to radio cable
(minidin 6pin data connector) + DS18x20 input

Data:
23.10.2014

Opracował:
Mateusz Plocinski

1/1

Sprawdził: